

Series 08 stainless steel absolute 4...20mA encoder up to 1/2"



0	8	X	X	-	0	6	X	X	-	0	X	X	X
							<u>Shaft Size</u>						
							10 = 10 mm						
							12 = 12 mm						
							<u>Connection</u>	<u>Housing Material</u>					
							1 = 2 m (6 ft) cable	S = Stainless Steel					
							2 = 5 m (16 ft) cable						
							4 = 15 m (50 ft) cable						

Precision: 10 bits in 360 degrees, 2.84 increments / degree



Zone 0, Class 1 Div 1

Technical Data


Operating temp:	- 20 ...+ 60 degrees C - 4 ...+ 140 degrees F
Max frequency:	5 kHz
Supply Voltage:	24V (current loop)
Weight:	26 oz (0.75 kg)
Protection:	IP 66 / X7 M
Housing and Shaft:	Stainless Steel
Bearings:	3 x 6803 ZZ C2
Torque:	0.8 oz/in (6 N-cm)
Shaft load:	Supports its own weight
Humidity:	Up to 100% permissible
Speed:	2000 RPM max.
Max. bits:	10 bit

Connection Options

Cable 2 meters	
+ Loop	Red
- Loop	Black

Output

Diagram is shown clockwise

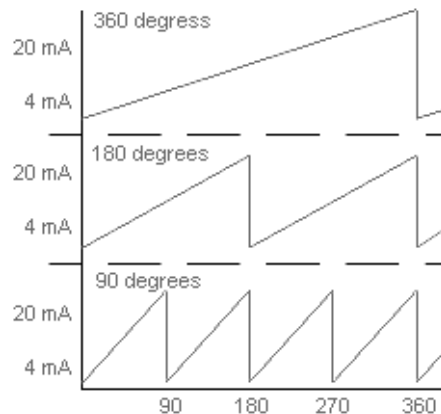

*4...20mA span based on 250 ohm load

Certifications

Best suited to work with the following isolators: [MTL5541](#)

IP67M

ATEX

IECEX


CSA

GOST (CU)

Mounting Instructions

Mount the tether on the machine or motor-frame. The tether can be bent to adapt to any surface. This assembly allows the encoder to float and increases the lifetime of the bearings. Connect the encoder as per wiring specifications. Make sure power supply is within the proper voltage and current rating. Encoder can be mounted with the setscrew on the machine side or on the opposite side for either CW or CCW. See datasheet for CW and CCW directions of the outputs.

Technical data for tether: 0.3 mm stainless steel sheet

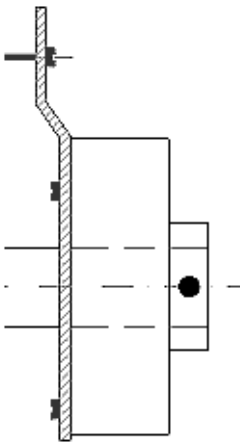

Dimensions

